

FMDCVANSI

Forbes Marshall Disc Check Valve (Metal-to-Metal / Soft / Viton Seating) Compatible to ANSI Flanges

Description

The Forbes Marshall disc check valves compatible to ANSI flanges, FMDCVANSI, are of the wafer pattern designed to be sandwiched between flanges. They are suitable for use on a wide range of fluids for applications in process lines, hot water systems, steam and condensate system etc. Face-to-face dimensions conform to EN558 part 1 series 52

Sizes and Pipe Connections

15, 20, 25, 32, 40, 50, 65, 80, 100NB suitable for installation between ANSI class 150 and 300

Optional Extras

Viton soft seats for oil, gas and steam application.
EPDM soft seats for water applications.

Certification

Available with IBR with metal seating only.
All certification / inspection requirement must be stated at the time of order placement.


Standard

Designed and manufactured in accordance with BS 7438.

Limiting Conditions

Body design conditions		ANSI 300
PMO - Maximum operating pressure		49 bar g
TMO - Maximum operating temperature	Standard spring	300°C
	Without spring	400°C
Minimum operating temperature (standard disc)		-10°C
Temperature Limits	Viton Seat	-10°C to +205°C
	EPDM Seat	-10°C to +150°C
Maximum cold hydraulic test pressure		73.5 bar (g)

Operating Range

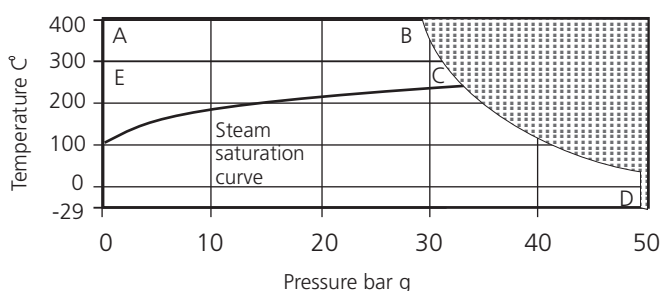

The product must not be used in this region.
A-B-D FMDCV (ANSI)
E-C-D FMDCV (ANSI) Standard Spring.

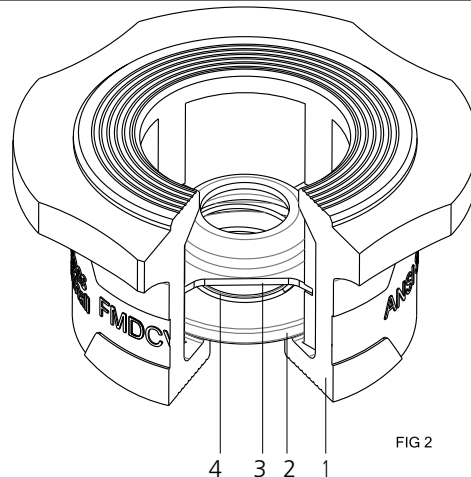


FIG 2

Materials

No	Part	Material	Standard
1	Body	Austenitic stainless steel	ASTMA 351 CF8M
2	Disc	Austenitic stainless steel	ASTMA 351 CF3M
3	Spring retainer	Austenitic stainless steel	ASTMA 240 SS2316L
4	Standard spring	Austenitic stainless steel	IS4454:IV:GR. 3 SS316


Standard Shut-off

Standard valves conform to DIN 3230 part 3, BN2. Valves conforming to DIN 3230 part 3, BO3 available on request.

Soft seated versions meet DIN3230 part 3 BN 1 and BO1 provided a differential pressure exists.

Operation

Forbes Marshall disc check valves are opened by the pressure of the fluid and closed by the spring as soon as ceases and before the reverse flow occurs.

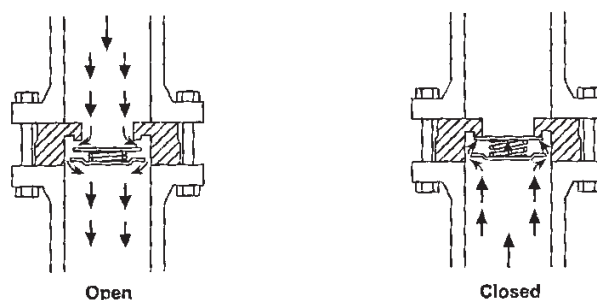

Dimensions / Weights (approximate) in mm and kg

SIZE	A	B	C	D	E	F	G	Weight
15NB	54.5	47	38	38	25	22.3	15	0.19
20NB	67	57	46	47	31	27.3	20	0.31
25NB	73	67	54	55	35	33.1	25	0.54
32NB	82	76	67	68	40	41.2	32	0.53
40NB	95	86	76	80	45	49.1	40	1.0
50NB	111	105	95	97	56	59.1	50	1.85
65NB	130	123	108	113	63	75.2	65	1.84
80NB	149	136	130	132	71	90.2	80	3.6
100NB	181	174	160	161	80	111.1	100	5.9

Kv Values

DN	15	20	25	32	40	50	65	80	100
Kv	4.4	7.4	12	17	26	39	60	84	150

For Conversion : Cv (UK)=Kv x 0.963 Cv(US)=kv x 1.158

Opening Pressures in mbar

Differential Pressures with zero flow for standard springs.


→ Flow direction

DN	15	20	25	32	40	50	65	80	100
↑	24	24	24	24	27	29	29	30	30
→	22	22	22	22	23	25	25	25	25
↓	19	19	19	19	19	19	19	19	19

Where lowest opening pressures are required, valves without springs can be installed in vertical pipes with bottom-to-top flow without spring

↑	2.5	2.5	3	3	4.0	4.5	4.5	5	6
---	-----	-----	---	---	-----	-----	-----	---	---

Pressure Loss Diagram

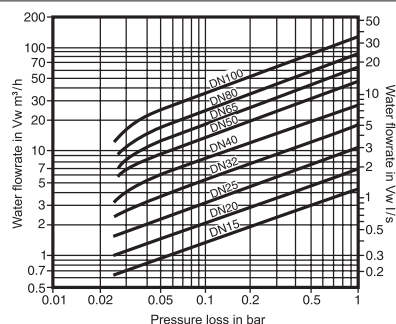


Pressure loss diagram with open valve at 20°C. The values indicated are applicable to spring loaded valves with horizontal flow. With vertical flow. Insignificant deviations occur only within the range of partial opening.

The Curves given in the chart are valid for water at 20°C To determine the pressure for other fluids the equivalent water volume flowrate must be calculated and used in the graph.

$$V_w = \sqrt{\frac{r}{1000}} \times V$$


Where : Vw = Equivalent water volume flow in l/s or m³/h
 r = Density of fluid kh/cm³
 V = Volume of fluid l/s or m³/h

Pressure loss information for steam, compressed air and gases is available from Forbes Marshall.

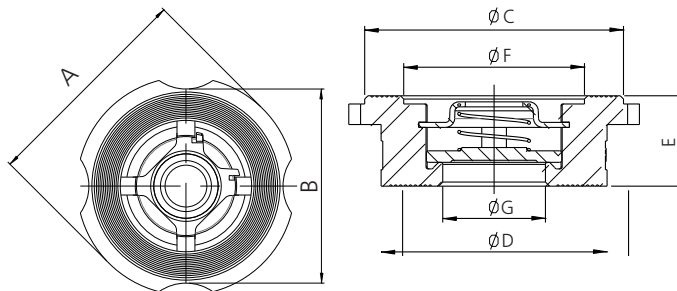

Safety Information, Installation and Maintenance

For full details see the user manual (99-001-1178326) supplied with the product. FMDCVANSI disc check valves must be fitted in accordance with the indicating correct fluid flow direction. When fitted with a spring they can be installed in any plane. When supplied without a spring they must be fitted in a vertical flow line with the flow from bottom-to-top.



Note : Flanges, bolts (or studs), nuts and joint gaskets are to be provided by the installer. Forbes Marshall disc check valves are non-maintainable (no spares are available) and are not suitable for use where heavily pulsating flow exists, such as when close to a compressor.

The available options are denoted by a marking on the valve body

W.	Without spring	Standard metal disc
'V'	Standard spring	Viton soft faced disc
'E'	Standard spring	EPDM soft faced disc
'WV'	Without spring	Viton soft faced disc
'WE'	Without spring	EPDM soft faced disc

No identification indicates a standard spring with a metal disc

Disposal

If a product containing a viton component has been subjected to a temperature approaching 315 OC or higher, then it may have decomposed and formed hydrofluoric acid. Avoid skin contact and inhalation of any fumes as the acid will cause deep skin burns and damages to the respiratory system.

How to Order

Example : 1 No. Forbes Marshall spring-loaded disc check valve, DN50 FMDCVANSI austenitic stainless steel for fitting between ANSI 300 flanges



www.forbesmarshall.com

Forbes Marshall Arca

Codel International

Krohne Marshall

Forbes Vyncke

Forbes Marshall Steam Systems

A: Forbes Marshall Pvt. Ltd.
 Opp. 106th Milestone, CTS 2220,
 Mumbai-Pune Road, Kasarwadi,
 Pune MH 411034 INDIA

P: +91(0)20-68138555

F: +91(0)20-68138402

E: ccmidc@forbesmarshall.com

© All rights reserved. Any reproduction or distribution in part or as a whole without written permission of Forbes Marshall Pvt Ltd, its associate companies or its subsidiaries ("FM Group") is prohibited.

Information, designs or specifications in this document are subject to change without notice. Responsibility for suitability, selection, installation, use, operation or maintenance of the product(s) rests solely with the purchaser and/or user. The contents of this document are presented for informational purposes only. FM Group disclaims liabilities or losses that may be incurred as a consequence of the use of this information.

Forbes Marshall International Pte. Ltd.

16A, Tuas Avenue 1,
 #05-21, JTC Space @Tuas
 Singapore - 639533

P: +65 6219 3890

CIN No: U28996PN1985PTC037806